



Ti-Pure™ R-103 Titanium Dioxide

Product Information

Product Description

Ti-Pure™ R-103 is a rutile titanium dioxide pigment manufactured by the chloride process. Its high opacity and very blue undertone tint produces clean, bright whites at low loadings in clear resins and those having natural color. Ti-Pure™ R-103 is specially formulated to reduce discoloration of resin compounds and finished plastic products during processing and exposure to ultraviolet light.


Table 1. Physical Properties

Titanium Dioxide, wt%, min.	96
Alumina, wt%, max.	3.2
Organic Treatment, wt%, carbon	0.2
Specific Gravity	4.1
pH (aqueous slurry)	6.5
Resistance (aqueous slurry), k ohm-cm, min.	4

Table 2. General Properties

Opacity Strength	High
Undertone Tint	Very Blue
Dispersibility in:	
Plasticized Vinyl	Very Good
Plasticizers	Fair
Dry Blending Operations	Good
Melt Compounding	Excellent
Flocculation Resistance	Very Good
Discoloration Resistance	Excellent
Weathering Resistance	Good

Figure 1. Optical Properties

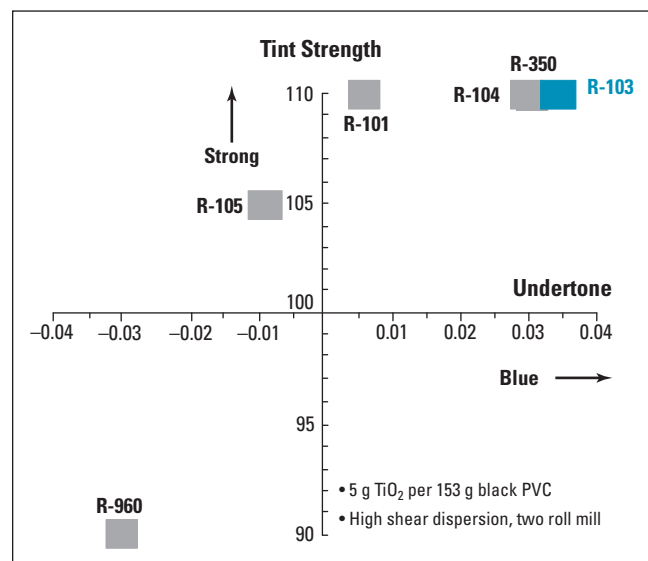

The exceptional blueness of Ti-Pure™ R-103 is of particular value in naturally colored resin systems like ABS. As much as 30% less TiO₂ can be used to achieve finished product requirements compared to neutral undertone pigments (Figure 2).

The unique alumina surface treatment of Ti-Pure™ R-103 provides excellent discoloration resistance.

The volatility of R-103 allows acceptable processing in all applications except high temperature thin PE cast film or PE extrusion coating. For these demanding applications, Ti-Pure™ grades R-101, R-104, or R-350 are recommended.

Ti-Pure™ R-103 is excellent in polyolefin or engineering resin applications requiring high opacity strength, very blue tint, excellent dispersion, and discoloration resistance. Ti-Pure™ R-103's surface treatment allows its use in lead-stabilized PVC systems, while still providing controlled chalking in exterior PVC applications.

Ti-Pure™ R-103 surface treatment makes it a preferred choice in liquid systems such as plastisols, liquid colorants, etc. Its blue tinted value and high tint strength in plastics products coupled with its ease of dispersion into liquid systems makes Ti-Pure™ R-103 a very good grade for liquid colorant concentrates, flexible PVC, and PVC plastisol applications.

Figure 2. Value of Blue Undertone in “Colored” Resin Exhibits Prepared in Cycloac® TD 1001 ABD

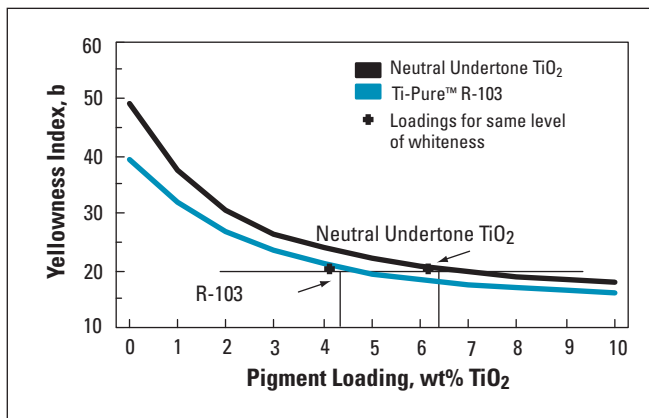


Figure 3. Ti-Pure™ R-103 Discoloration Resistance in HALS Stabilized LDPE


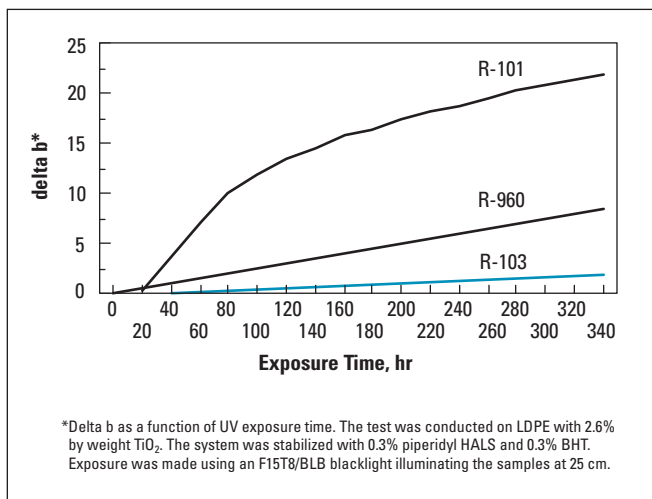


Figure 4. Thermo-Gravimetric Measurement of TiO₂ Volatility

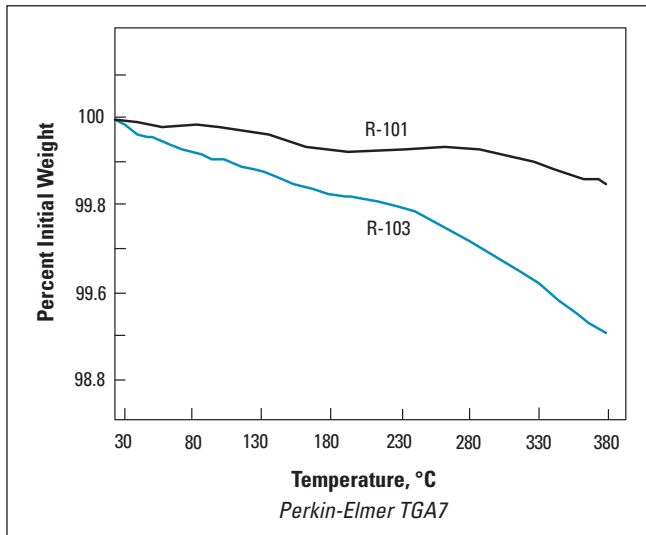

Shipping Containers

Ti-Pure™ R-103 rutile titanium dioxide is available in two recyclable package types to meet your needs:

- 25 kg polyethylene bags
- 1 metric ton (1,000 kg) flexible intermediate bulk containers

Ti-Pure™ R-103 is listed with NSF International for use in plastic pipe products.

For further information about this grade or to request a sample, please see the Ti-Pure™ web site.

CAUTION: Do not use Chemours materials in medical applications involving permanent implantation in the human body or contact with bodily fluids or tissues, unless the material has been provided from Chemours under a written contract that is consistent with Chemours policy regarding medical applications and expressly acknowledges the contemplated use. For further information, please contact your Chemours representative. You may also visit www.teflon.com/industrial to download a copy of the "Chemours POLICY Regarding Medical Applications" C-00000 and "Chemours CAUTION Regarding Medical Applications" C-00000. For medical emergencies, spills, or other critical situations, call (800) 441-7515 within the United States. For those outside of the United States, call (302) 774-1000.

The information set forth herein is furnished free of charge and based on technical data that Chemours believes to be reliable. It is intended for use by persons having technical skill, at their own discretion and risk. The handling precaution information contained herein is given with the understanding that those using it will satisfy themselves that their particular conditions of use present no health or safety hazards. Because conditions of product use are outside our control, Chemours makes no warranties, express or implied, and assumes no liability in connection with any use of this information. As with any material, evaluation of any compound under end-use conditions prior to specification is essential. Nothing herein is to be taken as a license to operate under or a recommendation to infringe any patents.

NO PART OF THIS MATERIAL MAY BE REPRODUCED, STORED IN A RETRIEVAL SYSTEM OR TRANSMITTED IN ANY FORM OR BY ANY MEANS ELECTRONIC, MECHANICAL, PHOTOCOPYING, RECORDING OR OTHERWISE WITHOUT THE PRIOR WRITTEN PERMISSION OF CHEMOURS.

For more information, visit www.titanium.chemours.com

© 2015 The Chemours Company TT, LLC. Ti-Pure™ and any associated logos are trademarks or copyrights of The Chemours Company TT, LLC.
Chemours™ and the Chemours Logo are trademarks of The Chemours Company

Replaces H-52214-8
C-10427 (7/15)